
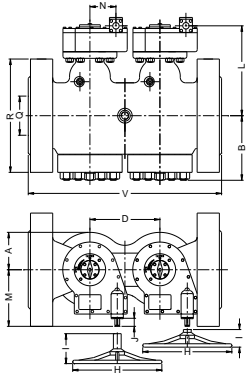
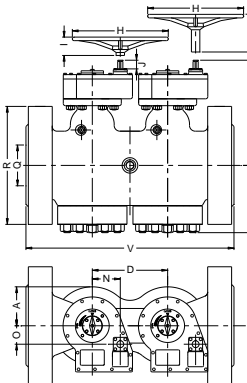


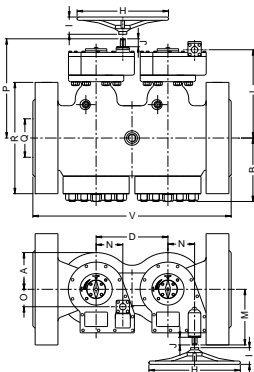

Class	Max CWP	Test Pressure	Pattern	Connections	Port	Materials	
						Body & Cover	Plug
300	740 Psi	Shell 1125 Psi Seat 815 Psi	Straightway	Flanges R.F or R.J. ASME B 16.5 Face to Face See column V Bleed: See Data Sheet or specified by purchaser	Rectangular	Cast Steel ASTM A 216 Grade WCB	Cast Iron ASTM A 126 Class B
						Cover: EN 10025-2 S355 J2	Steel

<p>Operation: Manual worm gear with vertical handwheel CC</p> 		<p>Operation: Manual worm gear with horizontal handwheel DD</p> 		<p>Operation: Manual worm gear with one horizontal handwheel and one vertical handwheel DC</p> 	
Plug	DN 6" - 20"	DN 6" - 20"		DN 6" - 20"	
Cast Iron	55-AP 70144 CC-XXXX	55-AP 70144 DD-XXXX		55-AP 70144 DC-XXXX	
Steel	55-AP 70147 CC-XXXX	55-AP 70147 DD-XXXX		55-AP 70147 DC-XXXX	

XXXX: See data sheet page 12 or code sheet page 5

DN	A	B	D	H	I	J	L	M	N	O	P	Q	R	Raised Face V	Ring Joint V
6"	116	213	232	400	101/201	38	314	205	85	46	374	152	318	559	575
8"	147	240	270	400	101/201	38	350	205	85	46	409	203	381	686	702
10"	186	312	360	600	101/201	38	417	230	95	70	477	254	445	826	842
12"	175	303	340	600	101/201	38	420	230	95	70	479	305	521	838	854
14"	202	334	380	600	101/201	38	506	298	135	69	577	337	584	889	905
16"	230	356	415	600	101/201	38	541	298	135	69	612	387	648	991	1006
18"	257	426	450	600	101/201	38	580	337	160	108	650	432	711	1092	1108
20"	284	471	494	600	101/201	38	659	337	160	108	729	483	775	1194	1213