
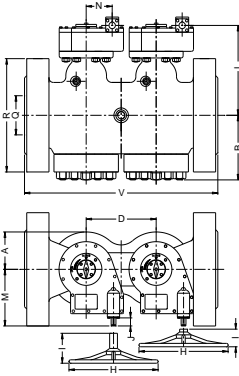
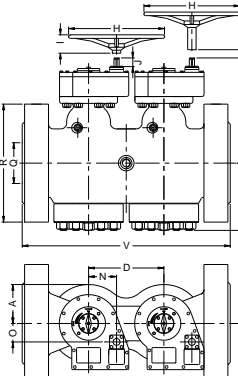


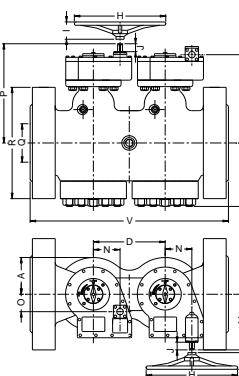

Class	Max CWP	Test Pressure	Pattern	Connections	Port	Materials	
						Body & Cover	Plug
1500	3705 Psi	Shell 5575 Psi Seat 4075 Psi	Straightway	Flanges R.F or R.J. ASME B 16.5 Face to Face acc. to ASME B16.10 Regular and Venturi Pattern Bleed: See Data Sheet or specified by purchaser	Rectangular	Cast Steel ASTM A 216 Grade WCB Cover: EN 10025-2 S355 J2	Cast Iron ASTM A 126 Class B  Steel

<p>Operation: Manual worm gear with vertical handwheel CC,</p> 		<p>Operation: Manual worm gear with horizontal handwheel DD,</p> 		<p>Operation: Manual worm gear with one horizontal handwheel and one vertical handwheel DC,</p> 	
Plug	DN 6" - 18"	DN 6" - 18"	DN 6" - 18"	DN 6" - 18"	DN 6" - 18"
Cast Iron	55-AP 70184 CC-XXXX	55-AP 70184 DD-XXXX	55-AP 70184 DD-XXXX	55-AP 70184 DC-XXXX	55-AP 70187 DC-XXXX
Steel	55-AP 70187 CC-XXXX	55-AP 70187 DD-XXXX	55-AP 70187 DD-XXXX	55-AP 70187 DC-XXXX	55-AP 70187 DC-XXXX

XXXX: See data sheet page 12 or code sheet page 5

DN	A	B	D	H	I	J	L	M	N	O	P	Q	R	V	Ring Joint
6"	143	255	260	400	101	38	338	205	85	46	398	137	394	705	711
8"	169	312	300	500	101	38	373	230	95	70	434	178	483	832	842
10"	208	364	380	600	101	38	477	298	135	69	548	222	584	991	1000
12"	243	419	452	600	101	38	552	337	160	108	623	264	673	1130	1146
14"	243	419	492	600	101	38	561	337	160	108	632	289	749	*1257	*1276
16"	276	498	560	700	101	38	621	397	176	168	692	330	826	1384	1407
18"	315	561	640	700	101	38	710	438	200	210	783	372	914	*1537	*1559

Note: \*Not included in the standards.